



F60 Android POS Machine



Single Screen Configuration
15.6" + LED 8 Display



Dual Screen Configuration
15.6"+15.6" / 15.6"+14.1" / 15.6"+14.0"



Build-in 80mm. Thermal Printer



Screen angle adjustable



SUPERMARKET



BAKERY



MANAGEMENT



CLOTHING SHOP



RESTAURANT




SHOPPING MALL

Specification

| Mainboard | |
|---------------------------------|--|
| Operation system | Android 7.1 |
| CPU | Allwinner Cortex-A53 64 Bit Quad Core |
| RAM | 2/16 GB RAM/ROM (2/32 GB RAM/ROM Optional) |
| Extended | Support MicroSD (TF) , max to 64G |
| Speaker | 3W speaker |
| Connection I/O Port | |
| Power | DC-IN |
| LAN | 1X RJ45 10/100/1000 |
| Cash Drawer | 1X RJ11 Cash Drawer / Support Loyverse |
| USB | 2X USB A / 6X USB 2.0 |
| Audio | 1X 3.5 mm. Audio Jack |
| SD Card | 1X SD Card Slot |
| Wireless Connection | |
| WiFi | Support IEEE 802.11a/b/g/n wireless protocol 2.4G (standard) |
| Bluetooth | BT 2.1/3.0/4.0/4.2 |
| Main Screen | |
| Specification | 15.6" 1920 x 1080 10 Point capacitive touch screen |
| Customer Screen (Optional) | |
| 14.0" | 1280 x 800 |
| 14.1" | 1366 x 768 |
| 15.6" | 1920 x 1080 |
| LED Display | Digital LED 8 Segment Display |
| Build-in 58 mm. Thermal Printer | |
| Paper Width | 58 mm. (55 mm. Print Area) |
| Paper Roll | 60 mm. |
| Resolution | 200 DPI |
| Density | 300 Dot/Line |
| Print Speed | 160 mm./s |
| Printable Content | GBK Chinese character library, ASCII characters, one-dimensional barcode, support different density point map, raster bitmap and download bitmap printing. Scalable 2D barcodes. |
| Default Font | 9X17 (ASCII), 24x24 (Chinese) |
| Barcode Support | UPC-A, UPC-E, EAN-13, EAN-8, CODE39, ITF25, CODABAR, CODE93, CODE128, PDF417, QR Code, DATAMatrix |
| Media Support | |
| Image | BMP, JPEG, PNG, GIF, etc... |
| Video | MKV, TS, FLV, AVI, VOB, MOV, WMV, MP4, etc... |
| Audio | MP3, WMA, APE, Flac, etc... |
| Other | |
| Power | 12V DC 5W |
| Operation Temperature | -20 ~ 70 °C |
| Storage Temperature | -40 ~ 125 °C |
| Humidity | <75% |

Connection I/O Port

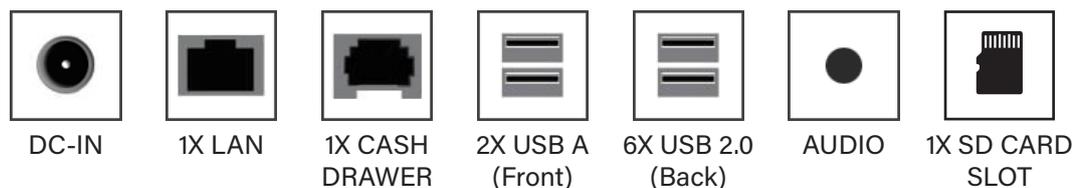



F60 Android POS Machine



Single Screen Configuration
15.6" + LED 8 Display



Dual Screen Configuration
15.6"+15.6" / 15.6"+14.1" / 15.6"+14.0"



Build-in 80mm. Thermal Printer



Screen angle adjustable



SUPERMARKET



BAKERY



MANAGEMENT



CLOTHING SHOP



RESTAURANT




SHOPPING MALL

Specification

| Mainboard | |
|----------------------------|---|
| Operation system | Android 7.1 |
| CPU | Allwinner Cortex-A53 64 Bit Quad Core |
| RAM | 2/16 GB RAM/ROM (2/32 GB Optional) |
| Extended | Support MicroSD (TF) , max to 64G |
| Speaker | 3W speaker |
| Connection I/O Port | |
| Power | DC-IN |
| LAN | 1X RJ45 10/100/1000 |
| Cash Drawer | 1X RJ11 Cash Drawer (Support Loyverse) |
| USB | 6X USB 2.0 |
| Audio | 1X 3.5 mm. Audio Jack |
| SD Card | 1X SD Card Slot |
| Wireless Connection | |
| WiFi | |
| Bluetooth | |
| Main Screen | |
| Specification | 15.6" 1920 x 1080 10 Point capacitive touch screen |
| Customer Screen (Optional) | |
| 14.0" | 1280 x 800 |
| 14.1" | 1366 x 768 |
| 15.6" | 1920 x 1080 |
| LED Display | Digital LED 8 Segment Display |
| Build-in Thermal Printer | |
| Paper Width | 80 mm. (72 mm. Effective) |
| Paper Roll | 80 mm. |
| Density | 8 Dot/mm. , 576 Dot/Line |
| Print Speed | 160 mm./s |
| Print Head | 100,000 meter |
| Cutter Life | 1,000,000. Cut |
| Barcode Support | UPC-A, UPC-E, EAN-13, EAN-8, CODE39, ITF25, CODABAR, CODE93, CODE128, PDF417, QR Code, DATAMatrix |
| Media Support | |
| Image | BMP , JPEG , PNG , GIF , etc... |
| Video | MKV , TS , FLV , AVI , VOB , MOV , WMV , MP4 , etc... |
| Audio | MP3 , WMA , APE , Flac , etc... |
| Other | |
| Power | 12V DC 5W |
| Operation Temperature | -20 ~ 70 °C |
| Storage Temperature | -40 ~ 125 °C |
| Hummidity | <75% |

Connection I/O Port




DC-IN




1X LAN




1X CASH
DRAWER



2X USB A
(Front)



6X USB 2.0
(Back)



AUDIO



1X SD CARD
SLOT