

# HR100

## High Performance Hand-held Barcode Scanner



This general-purpose, high-performance hand-held barcode scanner caters to most 1D barcode scanning needs.

### Product Features



- **Durable and Easy to Operate**

The ergonomic design, superior performance and ease of use make it ideally suited for various applications such as retail, logistics, office automation and many more. With a scan speed of 300 scans per second and a scan distance of more than 30cm, it is a solid (state) alternative to hand-held laser scanning.


- **Cutting-edge Technology**

Its core technology **UIMG**® is independently developed by Newland Auto-ID, comprising optical system, digitizer, decoder, image processor and embedded system. The device delivers an unprecedented decoding capability on 1D symbologies. Users can create their own apps with our development tools to identify particular images and symbols.


### Depth of Field

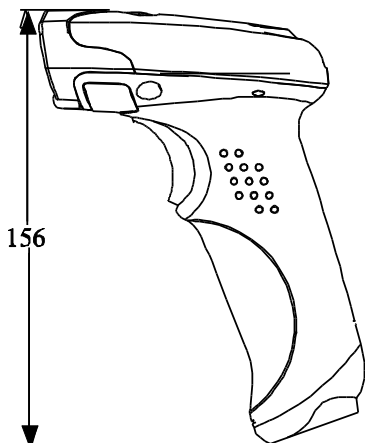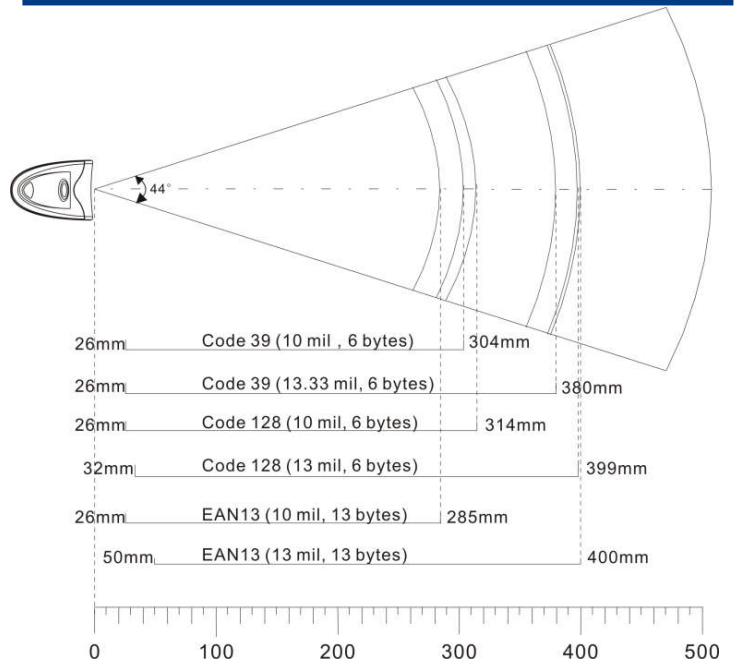

Left

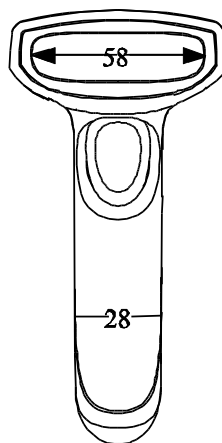

Front

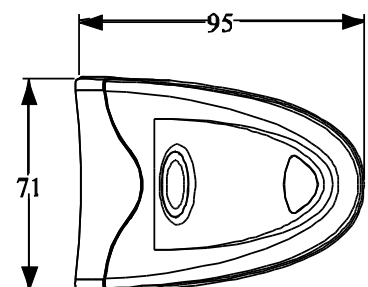

Top

## Specifications

| Performance                        |   |
|------------------------------------|---|
| <b>Image Sensor</b>                | Linear imager   |
| <b>Interface</b>                   | RS-232, USB, PS/2   |
| <b>Symbologies</b>                 | Code128, EAN-13, EAN-8, Code 39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ISBN, Code 93, UCC/EAN-128, GS1 Databar, etc. |
| <b>Resolution</b>                  | ≥ 5mil  |
| <b>Light Source</b>                | 620nm Visible Red LED   |
| <b>Scan Rate</b>                   | 300 scans per second  |
| <b>Illumination</b>                | 0 ~ 80,000 LUX  |
| <b>Symbol Contrast</b>             | ≥ 30%   |
| <b>Pitch</b>                       | ±55 °@ 0 °Roll and 0 °Skew  |
| <b>Scan Angle** Roll</b>           | ±25 °@ 0 °Pitch and 0 °Skew   |
| <b>Skew</b>                        | ±75 °@ 0 °Roll and 0 °Pitch   |
| Mechanical/ Electrical             |   |
| <b>Operating Voltage</b>           | DC 5.0V   |
| <b>Maximum Current</b>             | 150mA   |
| <b>Operating Current</b>           | 120mA   |
| <b>Standby Current</b>             | 45mA  |
| <b>Colors</b>                      | Black or white  |
| <b>Weight</b>                      | 105g  |
| Environmental                      |   |
| <b>Operating Temperature</b>       | 0°C to 50°C   |
| <b>Storage Temperature</b>         | -40°C to 60°C   |
| <b>Humidity</b>                    | 0 to 95% ( non-condensing )   |
| <b>Drop</b>                        | 1.5 m drops to concrete   |
| Certifications                     |   |
| FCC Part15 Class B, CE EMC Class B |   |
| Accessories                        |   |
| <b>Stand</b>                       | The scanner can be mounted on the stand for hands-free scanning.  |
| <b>RS-232 Cable</b>                | Equipped with a power connector; used to connect the scanner to a host device.  |
| <b>Flex Cable</b>                  |   |
| <b>USB Cable</b>                   | Used to connect the scanner to a host device.   |
| <b>PS/2 Cable</b>                  | Used to connect the scanner to a host device.   |
| <b>Power Adaptor</b>               | Used to provide power for the scanner.<br>Output: DC5V,1.5A; Input: AC100~240V, 50~60Hz.                                  |

### \*\*Test Condition:

Code 39, 3 Bytes ; Resolution = 10mil; W:N = 2.5:1 ; PCS = 0.8 ; Barcode Height = 40mm;  
Scan Distance = 210mm; T=23 °C; Illumination= 200 LUX